

#### Tender specification:

#### “Copert” PE-RT plastic pipes


for surface heating and cooling systems.

PE-RT pipes according to DIN 16833, DIN 16834, oxygen tight according to DIN 4726

Minimum bending radius: 5 x outer diameter

Dimension	Max. operating pressure p <sub>s</sub> : at 70 °C
14 x 2 mm	6 bar
16 x 2 mm	6 bar
17 x 2 mm	6 bar
20 x 2 mm	6 bar

“Copert” PE-RT plastic pipes on rolls					
Item no.	Dim.	Length per roll	Core Ø of roll	Outer Ø of roll	Height of roll
1402052	14 x 2	240 m	430 mm	760 mm	190 mm
1402054	14 x 2	600 m	500 mm	880 mm	285 mm
1402152	16 x 2	240 m	470 mm	780 mm	250 mm
1402154	16 x 2	600 m	390 mm	880 mm	285 mm
1402252	17 x 2	240 m	470 mm	780 mm	250 mm
1402254	17 x 2	600 m	420 mm	960 mm	300 mm
1402352	20 x 2	240 m	350 mm	780 mm	260 mm

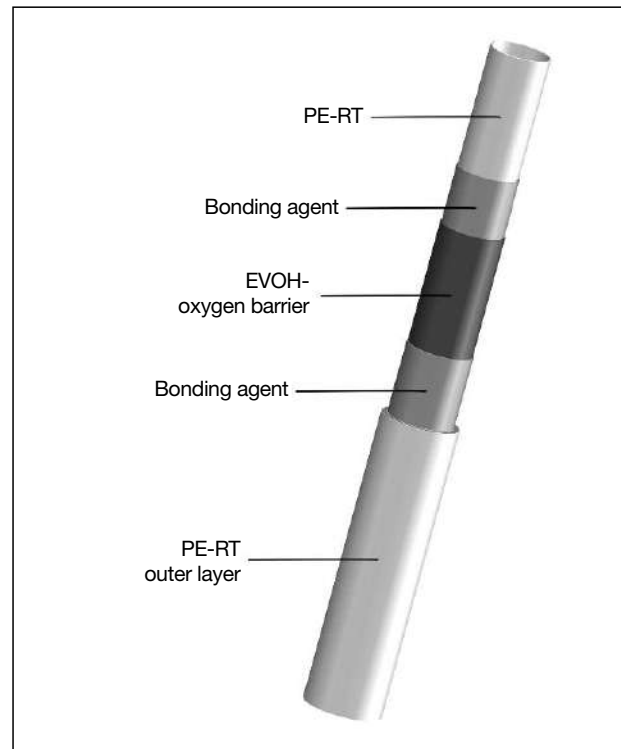

“Copert” PE-RT plastic pipe

OVENTROP GmbH & Co. KG  
 Paul-Oventrop-Straße 1  
 D-59939 Olsberg  
 Germany  
 Telephone +49(0) 2962 82-0  
 Fax +49(0) 2962 82-450  
 E-Mail mail@oventrop.de  
 Internet www.oventrop.de

For an overview of our global presence  
 visit [www.oventrop.de](http://www.oventrop.de)

Subject to technical modification without notice.

Product range 2  
 ti 277-EN/20/MW  
 Edition 2015